

Apeos C325 z / C325 dw
ApeosPrint C325 dw



Amazingly Compact



Amazingly Compact Yet Reliable

- Machine life up to 100,000 pages
- Maximized reliability with less mechanical parts

Superb Printing Quality

- Caters to a wide printing needs from office to stores
- Rich colour expression with LED printhead and IReCT*
- EA-Eco toner for fine text and fine lines
- Image enhancement technology reproduces smooth diagonal lines

* Image Registration Control Technology



Compact Size
by **40%**

Security for Important Information

- Prevents information leakage with Secure Print
- SMBv3 / TLS1.3 supported for secure communication
- Connect to wireless LAN with WPA-Enterprise
- Password protection for incoming fax*
- Re-enter fax number to prevent fax transmission error*

* Available only for Apeos C325 z

Apeos C325 z / C325 dw and ApeosPrint C325 dw cat superb colour & monochrome printing quality, high reli

Truly Powerful

Easy to Print and Scan*1

- Printing from scan*1 to your smart phones & tablets easily, using NFC and mobile printing applications
- Scan files to your PC*1, USB flash drive*1, E-mail*1, and shared folders*1
- ID card scan*1

Fits anywhere, for counter services, clinics and more


- Compact design
- Fast printing : 31 ppm on A4 size, 41 ppm on A5 size
- 1-pass, 2-sided scanning : 45 ppm on B/W, 22 ppm on colour*2
- Handle high-volume documents with Automatic document Feeder*1
- High-yield toner cartridges
- Cost & paper saving with automatic 2-sided printing a and ID*1
- Security control by disabling Wi-Fi / NFC connection at the counter services or public spaces

*1 Available only for Apeos C325 z / C325 dw

*2 Available only for Apeos C325 z

Apeos C325 z / C325 dw

- A4 all-in-one printer
- 2.8-inch colour touch panel
- Ethernet, USB & Wi-Fi supported
- Scan to PC, email, shared folders
- ID card copy, 2-up copy & printing



* Available only for Apeos C325 z

Apeos C325 z / C325 dw **21kg**



Print Utility

ApeosPrint C325 dw **17kg**



ApeosPrint C325 dw


- A4 printer
- 2-line LCD display
- Ethernet, USB & Wi-Fi supported



Manage & Control



Easy installation and easy fleet management for retail stores & enterprise offices

- Hassle-free for multiple manual settings. Setting cloning available for multiple-device installation.
- Save your time with SMTP server detection in "scan to mail*", "fax to mail*" setting.



- EP-BB light, a service offered for free, assists customers to enable quick failure recovery and proactive management of consumables.
- EP-BB light service enables efficient and effective use of multi-function devices.

- Suitable for shop business with flexible access setting*
* Available only for Apeos C325 z / C325 dw

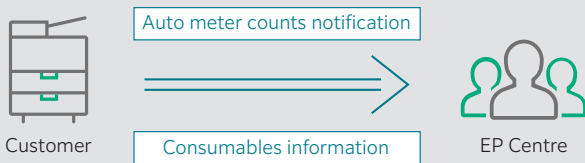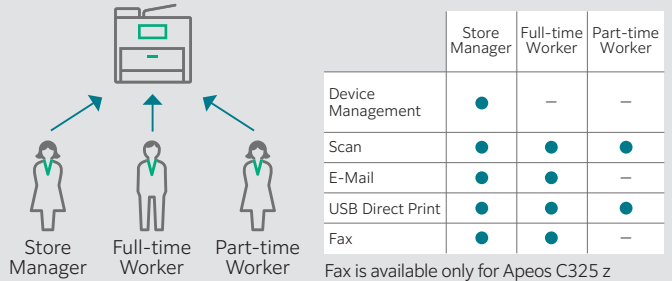

er to your needs with amazing compactness, ability and security.

Smart & Scalable

- 1. Automatic Document Feeder*:**
Scans sheet documents continuously
- 2. 2.8-inch colour touch panel*:**
Intuitive colour touch panel lets you find just what you want at a glance
- 3. USB port*:**
Use your own USB flash drive to print / scan to directly
- 4. Bypass Tray (50 Sheets):**
Can feed various paper types such as envelopes and postcards
- 5. Standard Tray (250 sheets):**
Supports various types & sizes of paper
- 6. Optional Tray (250 sheets):**
Maximum 550 sheets paper capacity. Scalable for high-volume printing needs
- 7. Built-in NFC:**
Start Print Utility application and place your mobile device over the NFC tag to print / scan
- 8. Wi-Fi Direct:**
Offers built-in wireless printing function

* Available only for Apeos C325 z / C325 dw

Options

Product Name	Product Code
250 Sheets Feeder Unit	EL300952

Consumables/Supplies

Product Name	Product Code	Yield
Drum Cartridge (YMCK)	CT351282	Up to 50,000 pages*1
High Capacity Toner Cartridge (K)	CT203486	Up to 6,000 pages*2
High Capacity Toner Cartridge (C)	CT203487	Up to 4,000 pages*2
High Capacity Toner Cartridge (M)	CT203488	Up to 4,000 pages*2
High Capacity Toner Cartridge (Y)	CT203489	Up to 4,000 pages*2
Standard Capacity Toner Cartridge (K)	CT203490	Up to 3,000 pages*2
Standard Capacity Toner Cartridge (C)	CT203491	Up to 2,000 pages*2
Standard Capacity Toner Cartridge (M)	CT203492	Up to 2,000 pages*2
Standard Capacity Toner Cartridge (Y)	CT203493	Up to 2,000 pages*2
Waste Toner Bottle	CWAA0980	Up to 6,000 pages*3



2.8-inch colour touch panel



*1: The number of printable pages is a reference value derived from the average of 3 sheets printed in A4, 1 sided, image coverage per colour 5 %, colour/monochrome rate 50 : 50 in one setting, under continuous printing usage conditions. The actual number of printable pages may vary to below half the reference value, depending on paper type, paper direction, input/output tray settings, initialization operations upon powering ON/OFF the device, tuning operations to maintain print quality, and other such usage environment conditions. *2: Published value based on ISO/IEC 19798 standards. The actual number of printable pages may vary significantly from the published value, depending on printing content, paper size, paper type, usage conditions, initialization operations upon powering ON/OFF the device, tuning operations to maintain print quality, and other such usage environment conditions. *3: The number of printable pages is a reference value when printing in A4, 1 sided, image coverage per colour 5 %, colour/monochrome rate 50 : 50. The actual number of printable pages may vary significantly from the reference value, depending on printing content, paper size, paper type, usage conditions, initialization operations upon powering ON/OFF the device, tuning operations to maintain print quality, and other such usage environment conditions.

Apeos C325 z / C325 dw and ApeosPrint C325 dw, Functions & Specifications

For the printing function of Apeos C325 z / C325 dw, please refer to the "Print Function" of ApeosPrint C325 dw below:

Basic Specifications / Copy Function

Item	Apeos C325 z	Apeos C325 dw
Type	Desktop	
Memory Capacity	512 MB (Max: 512 MB)	
Storage Device Capacity*1	eMMC: 1.8 GB	
Colour Capability	Full Colour	
Scan Resolution	600 x 600 dpi	
Printing Resolution	600 x 2400 dpi	
Warm-up Time	35 seconds or less (23 degrees Celsius room temperature)	
Recovery Time (Recovery Time from Sleep Mode)	17 seconds or less (23 degrees Celsius room temperature)	
Original Size	Maximum of A4, Letter, Legal*2 for both Sheet and Book	
Paper Size	Max	A4, Letter, Legal
	Min	A6, 76 x 127 mm
Paper Weight*3	Image loss width	Lead edge 4.1 mm, Trail edge 4.1 mm, Right/Left edge 4.1 mm
	Paper Tray	60 to 176 gsm
	Bypass Tray	60 to 176 gsm
First Copy Output Time*4	B/W: 9.5 sec. (A4) Colour: 12.0 sec. (A4)	
Continuous Copy Speed*5	A4	B/W: 31 ppm Colour: 31 ppm
	A5	B/W: 41 ppm Colour: 41 ppm
Paper Tray Capacity*6	Standard	Standard Tray: 250 sheets Bypass Tray: 50 sheets
	Optional	250 Sheets Feeder Unit: 250 sheets
	Max	550 sheets [Standard + 250 Sheets Feeder Unit]
Output Tray Capacity*6	150 sheets (Face down)	
Power Supply	AC220-240 V +/- 10%, 10 A, 50/60 Hz common	
Maximum Power Consumption	1120 W Sleep Mode: 0.5 W Low Power Mode: 11 W Ready Mode: 41 W	
Dimensions	W 410 x D 430 x H 366 mm	
Weight*7	20.6 kg	20.5 kg

*1: The Storage Device Capacity is not totally available for customers. *2: Not available on Scanner Glass. *3: It is recommended to use our recommended paper. Correct print output may not be possible depending on the requirement. *4: Measured in accordance to ISO/IEC 29183. *5: The speed may be reduced due to the image quality adjustment. *6: 80 gsm paper. *7: Excluding Toner Cartridge.

Scan Function

Item	Description
Type	Colour Scanner
Scan Resolution	Scan to PC TWIN: 50 x 50 to 9600 x 9600 dpi WIA : 75 dpi, 100 dpi, 150 dpi, 200 dpi, 300 dpi, 400 dpi, 600 dpi
	Scan to Network/ e-mail 200 dpi, 300 dpi, 400 dpi*1, 600 dpi*1
Scan Speed	Same as the Scan Speed for the Automatic Document Feeder
Interface	Standard Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T, USB2.0 Wireless LAN (IEEE 802.11 b / g / n)

Note: WIA stands for Windows Image Acquisition.
*1: When scanner glass is used.

Fax Function

Item	Description
Original Size	Scanner Glass: Max A4, Letter Automatic Document Feeder: Max Legal
Recording Paper Size	Max: Legal; Min: A4, Letter
Transmission Time	3 seconds and more but fewer than 4 seconds*1
Transmission Mode	ITU-T G3
Applicable Lines	Telephone subscriber line, PBX, Maximum 1 port*2 (G3-1 port)

Note: Fax function is available only for Apeos C325 z. *1: When A4 size document with approximately 700 characters is transmitted in standard image quality (8 x 3.85 lines/mm) and in high-speed mode (33.6 kbps or faster, JBIG). Only indicates the time for transmitting the image information and does not include the communication control time. The total communication time will vary depending on the document, the type of machine receiving the fax, and line condition. *2: No. of FAX lines is up to 1 port. Port refers to number of channels for FAX.

Automatic Document Feeder

Item	Apeos C325 z	Apeos C325 dw
Type	1 pass, 2 sided scanning Duplex Automatic Document Feeder	Automatic Document Feeder
Original Size / Paper Weight	Max: Legal; Min: A5*1 60 to 105 gsm (In Duplex: 60 to 105 gsm)	Max: Legal; Min: A5*1 60 to 105 gsm
Capacity*2	50 sheets	
Scan Speed*3	Copy (A4, Simplex) B/W: 30 ppm Colour: 16 ppm	B/W: 30 ppm, Colour: 15 ppm
	Scan*4 B/W: 30 ppm, Colour: 15 ppm (1 pass, 2 sided scanning; B/W: 45 ppm, Colour: 22 ppm)	

*1: The minimum custom size is 139.7 x 139.7 mm. *2: 80 gsm paper. *3: The scanning speed varies depending on the documents. *4: Standard document (A4), 200 dpi, to USB flash drive.

fujifilm.com/fbhc

FUJIFILM

FUJIFILM Business Innovation Hong Kong Limited

11/F, 12 Taikoo Wan Road, Taikoo Shing, Hong Kong
Tel. +852 2513 2888 Fax. +852 2560 6433

Customer Support Center

Hong Kong Tel. +852 2513 2513 Fax. +852 2513 2518
Macau Tel. +853 2855 8008 Fax. +853 2857 4996
Email: shm-fbhc-csc@fujifilm.com

FUJIFILM BI Hong Kong



This catalog includes Fuji Xerox product(s), licensed from Xerox Corporation. The distributor of the product(s) is FUJIFILM Business Innovation Corp. Xerox, Xerox and Design, as well as Fuji Xerox and Design are registered trademarks or trademarks of Xerox Corporation in Japan and/or other countries.

FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation.

Print Function

Item	ApeosPrint C325 dw
Printing Method	LED Xerography*1
Warm-up Time	35 seconds or less (23 degrees Celsius room temperature). 17 seconds or less from Sleep Mode.
Continuous Print Speed*2	Simplex A4 Colour: 31 ppm, B/W: 31 ppm A5 Colour: 41 ppm, B/W: 41 ppm
	Duplex A4 Colour: 19 ppm, B/W: 19 ppm A5 Colour: 23 ppm, B/W: 23 ppm
First Print Output Time*3	Colour: 11.0 seconds (A4), B/W: 10.0 seconds (A4)
Printing Resolution	Standard [PCL Driver] 600 x 2400 dpi [Postscript language compatibility] 600 x 2400 dpi
	Paper Size
Bypass Tray A6, A5, JIS B5, A4, Letter, Executive (184 x 267 mm), Folio (216 x 330 mm), Legal, COM-10, Monarch, DL, C5, Postcard (4 x 6"), Postcard (5 x 7"), Custom Size (Width: 76.2 to 215.9 mm, Length: 127.0 to 355.6 mm)	
Optional Tray 250 Sheets Feeder Unit: A5, JIS B5, A4, Letter, Executive (184 x 267 mm), Folio (216 x 330 mm), Legal, Custom Size (Width: 76.2 to 215.9 mm, Length: 210.0 to 355.6 mm)	
Paper Weight*4	2 Sided Printing A5, JIS B5, A4, Letter, Executive (184 x 267 mm), Folio (216 x 330 mm), Legal, Custom Size (Width: 139.0 to 215.9 mm, Length: 210.0 to 355.6 mm)
	Standard Tray 60 to 176 gsm
	Bypass Tray 60 to 176 gsm
Paper Tray Capacity*5	Optional Tray 250 Sheets Feeder Unit: 60 to 176 gsm
	2 Sided Printing 60 to 176 gsm
	Standard Tray: 250 sheets Bypass Tray: 50 sheets
Output Tray Capacity*5	150 sheets (Face down)
CPU	ARM Single core 667 MHz
Memory Capacity	512 MB (Max: 512 MB)
Storage Device Capacity*6	eMMC: 1.8 GB
Page Description Language	Standard PCL5 / PCL6, Postscript language compatibility
	Supported Operating System*7 Standard [PCL Driver] Windows 10 (32 bit/64 bit) Windows 8.1 (32 bit/64 bit) Windows Server 2019 (64 bit) Windows Server 2016 (64 bit) Windows Server 2012 R2 (64 bit) Windows Server 2012 (64 bit) [Postscript language compatibility] Windows 10 (32 bit/64 bit) Windows 8.1 (32 bit/64 bit) Windows Server 2019 (64 bit) Windows Server 2016 (64 bit) Windows Server 2012 R2 (64 bit) Windows Server 2012 (64 bit) macOS 11 / 10.15 / 10.14 / 10.13 / 10.12
Interface	Standard Ethernet 1000BASE-T / 100BASE-TX / 10BASE-T, USB2.0 Wireless LAN (IEEE 802.11 b / g / n)
Network Protocol	TCP/IP (Ipd, IPP/IPPS, Port9100, WSD)
Power Supply*8	AC220-240 V +/- 10%, 10 A, 50/60 Hz common
Operating Noise*9	In Operation: 6.99 B, 50.7 dB (A) Ready Mode: Noise-free
Maximum Power Consumption	Max 1110 W
	Sleep Mode 0.5 W
Average	Ready Mode: 37 W In Operation: 407 W
Dimensions	W 410 x D 430 x H 255 mm
Weight	17.4 kg (Including consumables and drum)
	16.8 kg (Excluding consumables and drum)

Note: WSD stands for Web Services on Devices. *1: LED + Xerographic. *2: When continuously printing original(Plain). The performance may be reduced depending on the paper type and the paper size. The speed may be reduced due to the image quality adjustment. Measured in accordance to ISO/IEC 24734. *3: When feeding from feeder tray of machine and USB connection. Numeric value varies depending on output environment. Measured in accordance to ISO/IEC 17629. *4: It is recommended to use our recommended paper. Correct print output may not be possible depending on the requirement. *5: 80 gsm paper. *6: The Storage Device Capacity is not totally available for customers. *7: Please refer to our official website for the latest supported OS. *8: Power outlets that provide the above power level is recommended. Maximum machine measured current: 6 A. *9: Measured in accordance to ISO7779. Unit B: Sound Power Level LWAd. Unit dB: Radiated Sound Pressure Level LpAm (bystander position). "Noise-free" refers to Radiated Sound Pressure Levels equal to or below ISO 7779 background noise absolute standards for each bystander position.

Notes

- To comply with paper weight specifications, it is recommended to use our recommended paper. Document may not be printed correctly depending on usage conditions.
- Functional spare parts will be available for at least 7 years after the product is no longer manufactured.

The available model varies depending on the country/region. Please ask the sales representatives for details.

The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law : •Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. •Unused postage stamps, post cards, etc. •Certificate stamps stipulated by law. •Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

Trademarks •FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation. •Apeos, ApeosPrint are registered trademarks or trademarks of FUJIFILM Business Innovation Corp. •Apple, AirPrint and Mac are trademarks of Apple Inc. registered in the U.S. and other countries. •Mopria®, the Mopria® Logo, and the Mopria Alliance™ word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. •All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.

For Your Safety

- Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified.
- Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.

FUJI XEROX

The available model varies depending on the country/region. Please ask the sales representatives for details.

The product specifications, appearance and other details in this brochure are subject to change without notice for improvements.

Reproduction Prohibitions Please note that reproduction of the following is prohibited by law : •Domestic and foreign currencies, government-issued securities, and national bonds and local bond certificates. •Unused postage stamps, post cards, etc. •Certificate stamps stipulated by law. •Reproducing works forming the subject matter of copyright (literary works, musical works, paintings, engravings, maps, cinematographic works, drawings, photographic works, etc.) is not permitted unless the reproduction is for the purpose of personal use, family use or other similar uses within a limited circle.

Trademarks •FUJIFILM and FUJIFILM logo are registered trademarks or trademarks of FUJIFILM Corporation. •Apeos, ApeosPrint are registered trademarks or trademarks of FUJIFILM Business Innovation Corp. •Apple, AirPrint and Mac are trademarks of Apple Inc. registered in the U.S. and other countries. •Mopria®, the Mopria® Logo, and the Mopria Alliance™ word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. •All product names and company names mentioned in this brochure are trademarks or registered trademarks of their respective companies.

For Your Safety

- Before using the product, read the Instruction Manual carefully for proper use. Use the product with the power source and voltage specified.
- Be sure to establish ground connection. Otherwise, electronic shock may result in the case of a failure or short circuit.

The information is as of July, 2021.